




HOME BUILDER

SCAFFOLDING




5 Year manufacturing warranty. Can be used indoors or out.
 Scaffold is designed to be easily transported in a conventional or mini pickup.
 As few as 6 different pieces make up a fully decked rolling tower with safety rail enclosure.
 Frame Capacities: 1500# per leg, 3000# per frame, 1000# distributed load when applied to horizontal


INDIVIDUAL COMPONENTS AND PRICING




42" W x 5'H
 S3-4260F
 \$67.00




60" W x 5'H
 S3-6060F
 \$69.00




42" W x 2.5'H
 S3-4230F
 \$64.00




60" W x 2.5'H
 S3-6030F
 \$65.00



Diagonal Brace
 6' Spacing, 24" Lock Spacing
 Works with both frame heights
 S3-6B
 \$21.00




8" Caster
 Non-Marring
 S3-CP8
 \$30.00




Base Plate 4"
 Stem S3-BP
 \$7.00



Leveling Jack Base-Rigid
 16" adjustment
 S3-LB
 \$24.00




Guard Rail
 End Panel 42"
 S3-2GE
 \$65.00



Guard Rail
 End Panel 60"
 S3-3GE
 \$72.45



Guard Rail Side Panel
 6' Spacing
 S3-6GS
 \$32.00

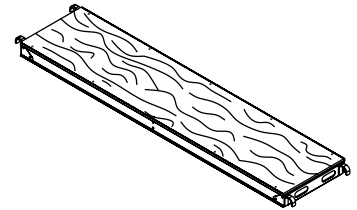

Aluminum/Plywood
 Walkboard 19"W x 6'L
 Capacity 75 PSF#
 S3-SH196
 \$125.00

Squaring Diagonal Brace 6' x 2''-'3.5''-'5'''	S3-6DB	13#	\$38.00
2" Fastening Snap Pin.....	S3-SN	0.12#.....	\$1.00
30" Outrigger	S3-30OR	15#.....	\$52.00

RETAIL PACKAGING

BOX A - FRAME SECTION\$188.00

Contains: 2 - 42" x 5' H Frames (S3-4260F)
2 - Diagonal Braces S3-6B

BOX B - WALK BOARDS\$250.00

Contains: 2 - Walkboard 19"W x 6'L (S3-SH196)

BOX C - GUARDRAILS.....\$246.00

Contains (C1): 2 - Guard Rail End Panel 42" (S3-2GE)
2 - Guard Rail Side Panel (S3-6GS)

Contains (C2): 1 - Squaring Diagonal Brace (S3-6DB)

NOTE: Comes in 2 boxes, C¹ & C²

BOX D - CASTERS\$120.00

Contains: 4 - G8" Casters (S3-CP8)


BOX E - LEVELING JACKS\$96.00

Contains: 4 - Leveling Jacks (S3-LB)

BOX F - OUTRIGGERS\$208.00

Contains: 4 - Outriggers (S3-30OR)

5' Tower Requires:



ROLLING

1 **A**
1 **B**
1 **D**


\$558.00

STATIONARY

1 **A**
1 **B**
1 **E**

\$534.00

10' Tower Requires:



ROLLING

2 **A**
1 **B**
1 **C¹**
1 **C²**
1 **D**


\$992.00

STATIONARY

2 **A**
1 **B**
1 **C¹**
1 **C²**
1 **E**

\$968.00

15' Tower Requires:

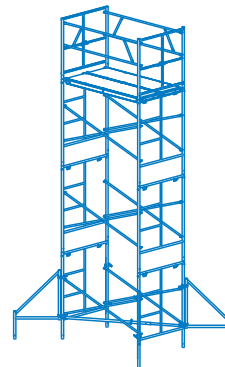

ROLLING

3 **A**
1 **B**
1 **C¹**
1 **C²**
2 **D**
1 **F**

\$1508.00

STATIONARY

3 **A**
1 **B**
1 **C¹**
1 **C²**
2 **E**
1 **F**

\$1460.00

UTILITY SCAFFOLD



29" Wide frames with 2" platform adjustment.
Rolls through a standard doorway.
Can stack units for increased work height.
Use on level surfaces or on stairs.
Powder-coated finish.
1000# capacity distributed

Utility Scaffold Unit.....MP-606.....145#.....\$260.00
6'H x 6'L x 29"W

Guard Rail Set.....GRS6.....90#.....\$150.00
2 pieces make a complete guard rail system including the toe board.

Narrow Outrigger Package.....NORP.....25#.....\$110.00

Mini-Fold ScaffoldMF4.....75#.....\$139.00
21" W x 52" H x 44" L

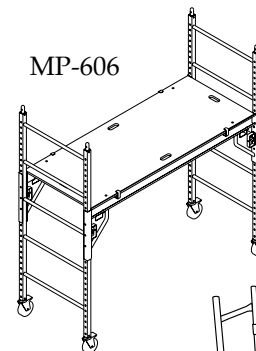

CARTS & MORE



HT-2351



HTK-2351

HT-2351	Hand Truck	45#.....	\$139.00
	23"x51", 10" Closed-cell foam tires		
HTK-2351	Fork Hand Truck	59#.....	\$285.00
	23"x51", 20" Removable/Adjustable Forks		
DP1830	Plastic Dolly.....	17#.....	\$45.00
	18" x 30" 600# Capacity		
DWC-3C6	Drywall Cart w/ Casters	75#.....	\$345.00
	3000# Capacity		
DWL-O	Drywall Lift	120#.....	\$399.00
	Lifting Height from 5' - 11' (extension available)		



DP1830



DWC-3C6



DWL-O

Safety Guidelines

Follow OSHA, state and local codes and regulations.

Attach each frame leg with fastening pin stored on frame cross member.

Do not overload scaffold or scaffold components. Follow the load capabilities as given by the scaffold manufacturer.

Do not ride a moving scaffold.

Climbing braces and skip bracing is prohibited.

Attach caster and base plate with fastening pin.
OSHA codes limit the free standing tower to 4 times the minimum base dimension. When stacking two units, use outriggers. Some states 3:1.

Start tower with a firm and level foundation. Use leveling jack to make adjustment on uneven surfaces.

Provide guard rails and toeboard systems on all towers over 10' high.

Fully deck the scaffold with walkboards on all working levels.

Scaffold should be plumb, level and square.

Use fastening pin to fasten caster to frame and frame to frame.

Code limits tower height to 4 times the minimum base dimension.

Use outriggers to increase the tower foot print. 4:1 code (on 24" frame 8') (42"=14') (60"=20') or restrain scaffold by using tie braces or guys. Some states 3:1.