

Stair Tower Package Price List



Granite Industries produces a complete line of Stair Tower products to be used in the construction field. They give personnel access to buildings under construction, bridges, observation towers and most any job in need of temporary stairs.

Stairs can also be used for access to work levels within a scaffold. Either by erecting an additional tower along side the scaffold or placing the stair within the scaffold.

When used as a free standing tower 20' and over in height it must be guyed or tied. Order the tie in package when needed.

To figure the number of stair packages needed, divide the height of the stair tower required by 6.5. Round up or down to the best height for the application.

Each tower will require a base plate and a top section.

A




B



C




D

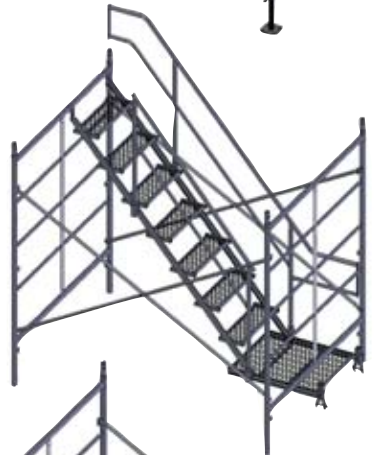

E




LOCK TYPES




(•) W-Lock

Use notched type brace only.




(•) Q-Lock

Use hole type brace only.




(•) X-Lock

Use hole type brace only.




(•) H-Lock

Use hole type brace only.



(•) S-Lock

Use hole type brace only.
Add \$4.00 per frame



(•) D-Lock

Use hole type brace only.
Add \$2.50 per frame

**PACKAGES WITH SCAFFOLD
AND STAIR COMPONENTS**

**PACKAGES WITH STAIR
COMPONENTS ONLY**

A	TOP DECK GUARD RAIL PKG (110#)\$316.00	
	2 () GRZ5E End guard rail panel 5'	\$75.00
B	2 GRZ7S Side Guard rail panel 7'	\$34.00
	2 GRZTB7 side toe board 7'	\$49.00
C	TOP DECK PACKAGE (99#).....\$374.00	TOP DECK PACKAGE (99#).....\$374.00
	1 SH28x7 Walkboard.....	\$172.00
D	1 SH28x7H Hinged Walkboard.....	\$202.00
	TOP STAIR TOWER PACKAGE (242#).....\$841.40	TOP STAIR STAIR PACKAGE (116#).....\$531.00
E	2..... ()FD566Q Double Step Frame.....	\$124.00
	4..... ()IN Insert	
	4..... RC rivet and cotter key	
	4..... HP Hinge pin 2"	
	2..... B7H27 Diag. brace 7'spac.	
	1..... AS64 Stair	
	1..... ASIT64 Top inside hand rail	\$70.00
	1..... ASOT64 Top outside hand rail.....	\$80.00
	4..... HP3 Hinge pin 3"	
	INTERMEDIATE TOWER PAKG (250#).....\$841.40	INTERMEDIATE STAIR PKG (121#).....\$531.80
	2..... ()FD566Q Double Step Frame	
	4..... ()IN Insert	
	4..... RC rivet and cotter key	
	4..... HP Hinge pin 2"	
	2..... B7H27 Diag. brace 7'spac.	
	1..... AS64 Stair	
	1..... ASIHR Inside hand rail	
	1..... ASOHR Outside hand rail	
	4..... HP3 Hinge pin 3"	
	BASE TOWER PACKAGE (310#)\$931.40	BASE STAIR PACKAGE (129#).....\$665.00
	2 ()FO566Q Open End Frame	\$102.00
	4..... ()IN Insert	\$2.50
	4..... RC rivet and cotter key	\$.35
	4..... HP Hinge pin 2"	\$1.00
	2..... B7H27 Diag. brace 7'spac.	\$23.50
	1..... AS64 Stair.....	\$375.00
	1..... ASIHR Inside hand rail	\$70.00
	1..... ASOHR Outside hand rail	\$80.00
	4..... HP3 Hinge pin 3"	\$1.50
	1..... ()ASPR Starter stair support	\$30.00
	4..... ()LJR Leveling Jack	\$26.00
		OPEN END GUARDS (20#)\$40.00
		(+) 2 GROES open end guards.....
		\$22.00

TIE IN PACKAGE (44#)\$180.00
 1..... 4 WT-36 Wall tie w/ clamps..... \$45.00

INTERMEDIATE REST PLATFORMS 43#\$172.00
 (+) 1 SH 28x7 walkboard\$172.00

UP CHARGES

Prices listed use either W,Q,X or H locks.

if S locks are requested add\$8.00

if D (+) locks are requested add\$4.50