

All packages come with 10' spacing braces, walkboards and guardrails.

Catalog No	Part No	Description	10 ft RT10-P10	15 ft RT10-P15	20 ft R10-P20
B-FS55S	10012-01	Step Frame 5'x5' B Size, S Lock, 27 3/4" Spacing	4	6	8
B10H27	03022	Brace - 10' Spacing, Hole End	4	6	8
B-IN	08002	9" Insert - B Size	8	12	16
SN	06003	2" Snap Pin	8	12	16
RC	06004	2" Rivet & cotter	8	12	16
B-C8	26003	8" Cast Iron Caster - B Size	4	4	8
B-BC510	05003-01	Squaring Brace - B Size	1	1	1
B-GRZ5E	20004-01	End Guard Rail - B Size	2	2	2
GRZ10S	20003	Side Guard Rail	2	2	2
GRZTB10	21007-01	Toe Board 10'	2	2	2
WBP119x10	35306	19" x 10' Walkboard	3	3	3
B-OR	25003-01	30" Outrigger	0	0	4
Working Height			17 ft	22 ft	27 ft
Set up full platforms at the following heights:			6' or 11'	6', 11' or 16'	6', 11', 16' or 21'

Meets federal OSHA standards. Check your state and local codes.

Packages are made up of standard parts making it easy to add accessories. We recommend purchasing additional walkboards to make setup easier and to create platforms at additional heights.


Full platforms consist of 3 walkboard and will measure 5' x 10'.

For outside or uneven surface add the leveling package. The 20 ft tower (R10-P20) requires 2 leveling packages (RT-PL). See below.


Leveling Package - RT-PL			
Item No	Part Number	Description	Qty
B-LJX	23012	Leveling Jack Extension	4

**SPECS:**  
**Tube size (O.D.):** B, 1-5/8"  
**Lock type:** S  
**Lock space:** 27 3/4"

S Lock Shown  
 Use braces with  
 hole ends.

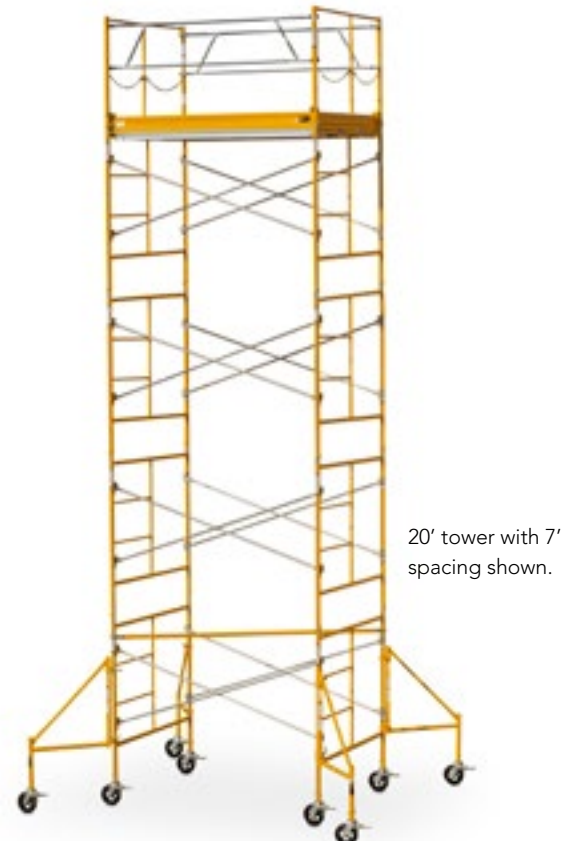

NOTE: Towers shown below have 7' spacing.

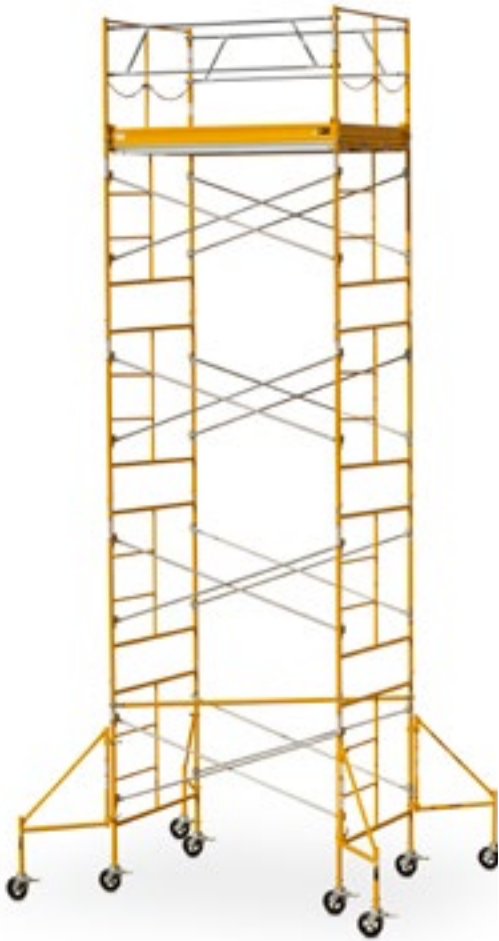

**20' Rolling Tower**



**15' Rolling Tower**



**10' Rolling Tower**